

How to Watch Body Camera Live Stream via RTMP

1. Preparation

- Make sure Cam Manager software is installed.
- Connect the device to your computer via USB or Wi-Fi.
- Ensure the body camera supports RTMP streaming.

2. Connect the Device

1. Open Cam Manager software.
2. Connect the body camera to your computer via USB or Wi-Fi.
3. Wait for the software to detect and connect to the device.

3. Configure RTMP Streaming Settings

1. Go to the device settings page.
2. Enter the correct Wi-Fi network information.
3. Select RTMP under the Protocol option.
4. Click Unlock memory card at the bottom to unlock the memory card.

Cam Manager 4.0

Login
Input Password: [6 dots] (Please Input 6 Digits or Capital Letters) [Connect Device]

ID Info
New Password: [] (Please Input 6 Digits or Capital Letters) [Apply]
Device ID: 0000010 User/Police ID 000001 [Apply]
WiFi Function: On [Apply] SSID (AP) 0000010 000001 PW (AP) [Apply]
WiFi STA Mode: On [Apply] SSID(STA) shellfilm PW(STA) Shellfilm1234 [Apply]
BLE: On [Apply] BLE Name [] [Apply]
CMSV Server IP 1.94.243.224 [Apply] Firmware Version 2025-10-13_V1.00.008

Time
Device Time 2025/10/28/14/11/59 [Sync Date and Time]

Other Settings
Resolution: 1080P [Apply] Length of Video: 10mins [Apply] Loop Recording: On [Apply]
Pre-record: Off [Apply] PreRecord Mute: Off [Apply] Post-record: Off [Apply]
Auto IR: Off [Apply] Auto Power Off: Off [Apply] Video Quality: High [Apply]
Speaker Volume: High [Apply] Record Notification: Off [Apply] RecordAfterStartup: Off [Apply]
Photo Size: 32M [Apply] Motion Detection: Off [Apply] Stealth Mode: Off [Apply]
Video Encode: H.264 [Apply] RSA Encryption: Off [Apply] LED Ring: [] [Apply]
GPS: On [Apply] **Protocol: RTMP [Apply]** Live Bitrate: 2Mb [Apply]
Guest Mode: [] [Apply] Operating Mode: [] [Apply]

4G Settings
4G: On [Apply] PIN Code: [] [Apply] APN: [] [Apply]
APN User: [] [Apply] APN PW: [] [Apply]

All LED: Off [Apply] [Battery Icon]: 46% [Power Off] **[Unlock Memory Card]** [Reset All Settings]

4. Add the RTMP Configuration Script

1. Open the file RTMP.lua with Notepad.
2. Change the stream URL to your server address, for example:

```
rtmp = {  
  ip = "",  
  url = "175.178.232.177/live/0000001",  
}
```

3. Copy the modified RTMP.lua file to the root directory of the device memory.
 4. After restarting, the device will automatically go online and begin streaming.
-

5. View the Live Stream

1. Open your browser and go to:
http://175.178.232.177:8080/console/ng_index.html#/streams?port=1985
2. Locate your device ID or stream URL.
3. If the device status shows "Online", click "Preview" on the right to start watching.

视频流(Streams)列表

ID	流名称	URL	Vhost	状态	在线人数	入口带宽	出口带宽	视频信息	音频信息	管理
vid-9e2a347	0000001	rtmp://175.178.232.177/live/0000001	__defaultVhost__	有流	1人	0.00Kbps	0.00Kbps	H264/High/5.1/1280x720	AAC/44100/Stereo/LC	预览 删除


Live feed:

SRS LivePlayer WHIP WHEP iOS/Android

URL: Play

NOV-0000010-000001

2025/10/28 14:27:26

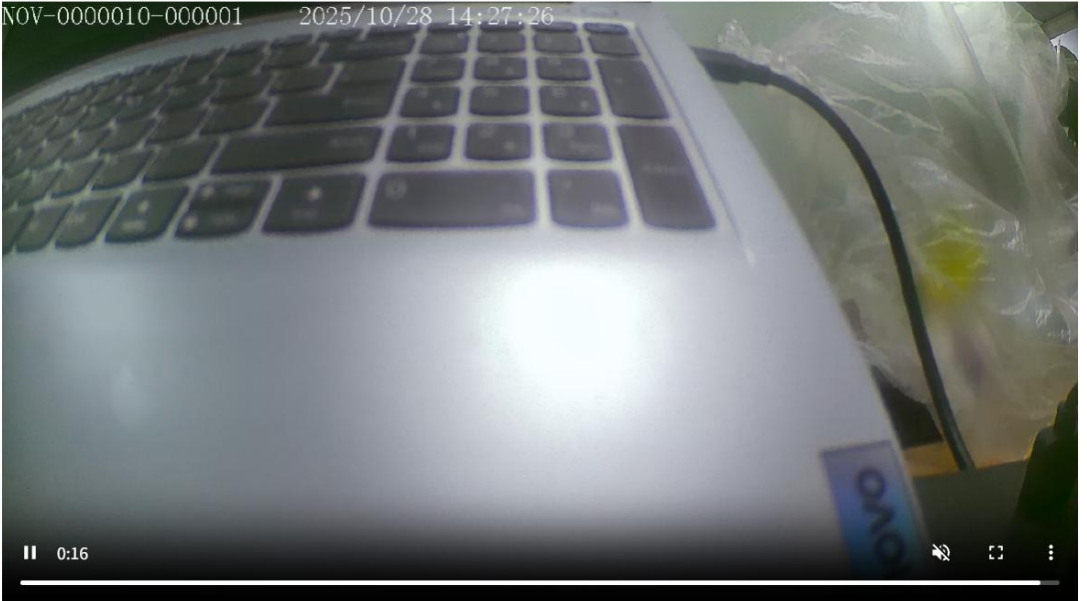

0:16

Share: [Please right-click and copy this link.](#)

Recommended other players:

- [flv.js](#), HTML5/MSE for playing HTTP-FLV
- [mpegs.js](#), HTML5/MSE for playing HTTP-TS

6. Notes

1. If the stream doesn't appear, check your Wi-Fi connection and stream URL.
2. Test your network bandwidth and latency to ensure smooth playback.